



ST

ST 300D

Tester for sensors

TECHNICAL FEATURES

Application

Available functions	Short circuit protection - Sleeping mode - Positive pulse
Description	DC sensors tester.
Usable with	Accessories suitable for all types of photoelectric and proximity sensors
Sensor output type detection	NPN / PNP (Automatic detect)
Functions	Sensor tester

Electrical data

Output voltage	4,8 ... 5,2 V (OUT + 5V) 19 ... 24,5V (OUT + 24V) 4,8 ... 5,2 (USB)
Output current for sensors	$\leq 200\text{mA}$ (@5V) $\leq 150\text{mA}$ (@24V)
Battery capacity	2500 mAh
Operating time	10h (@24V, 15mA)

Charging time	≤ 6h
Battery	The product contains a non removable Li-ion battery. For the delivery of the product, follow the National and IATA regulations.

Mechanical data


Dimensions	124x22x23mm
Weight	190g
Operating temperature	-10°C ... +45°C

Generical Data

Dimensions	124x22x23mm
Operating Temperature	-10°C ... +45°C

OTHERS

Dimensions

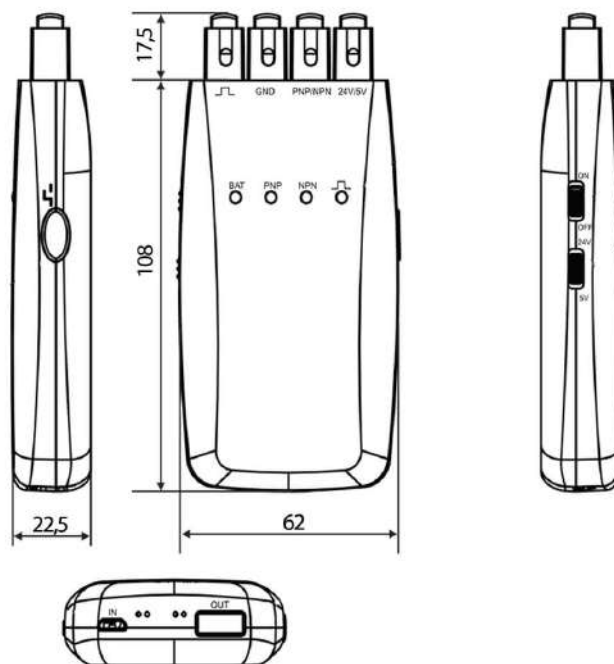

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
01/07/2024
14:48:55