



# AE

## AE1/AP-4F

Ind.M8,PNP-NO,M8  
plug,Nsch-LD  
M8 CYLINDRICAL  
INDUCTIVE SENSORS

## OVERVIEW

- Extremely reduced measure
- Metal housing
- LED status indicator 360° visible
- IP 67 housing protection
- ATEX models, cat. 3, available on request
- Complete protection against electrical damages
- Standard and long distance models
- Standard and short body housing



## TECHNICAL FEATURES

### Detection properties

Nominal sensing distance	4mm
Operanting distance	0â€ 3,24mm
Standard target	12x12mm FE360

Correction Factor	copper: 0,47 / aluminium: 0,52 / brass: 0,58 / stainless steel: 0,79
Thermal drift of Sr	< 10%
Repeat Accuracy	< 5% (UB 24V Ta=23°C ±5°C)
Hysteresis	1 ± 20%

### Application

Description	M8 standard no-flush mount
Functions	Proximity

### Outputs

Output type	PNP
Output Function	NO
Switching frequency	5kHz

### Electrical data

Operating Voltage	10...30Vdc
No-Load supply current	± 10mA
Load current	± 200mA
Leakage current	± 10 <sup>-4</sup> A
Output voltage drop	± 1,8V @200mA
Max ripple content	± 10%

LED indicators	Yellow LED output state
Time delay before availability	â‰‰ 50ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Impulsive Overvoltage Protection	Yes
Protection against inductive loads	Yes

#### Mechanical data

Mounting	Unshielded
Dimensions	M8 x 1 / L = 50mm
Weight	20g
Housing Material	Nickel-plated brass
Connections	M8 Plug
Active Head Material	PBT
Tightening torque	3Nm
Operating temperature	-25°Câ€¦+70°C
Material	Nickel-plated brass
Diameter/Dimension	M8

#### Test/Approvals

Approvals	CE UR
-----------	-------

EMC compatibility	IEC 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

#### Accessories


Supplied Accessories	2 nuts M8x1
----------------------	-------------

#### Generical Data

Dimensions	M8 x 1 / L = 50mm
Operating Temperature	-25°Câ€¦+70°C
Mechanical Protection	IP67

# CONNECTIONS

Eletrical diagram

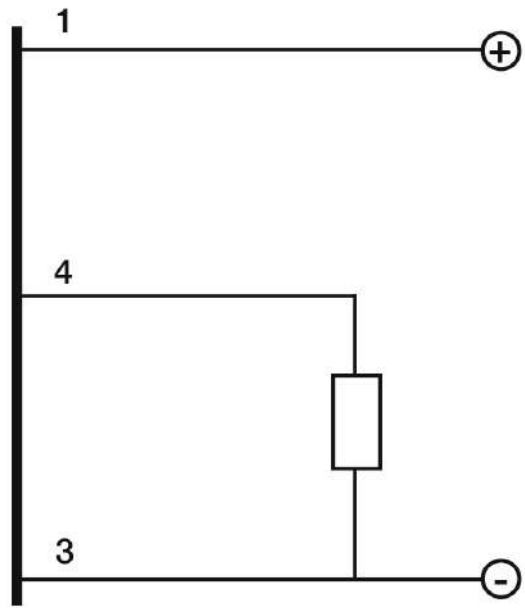


Connector




# OTHERS


Dimensions

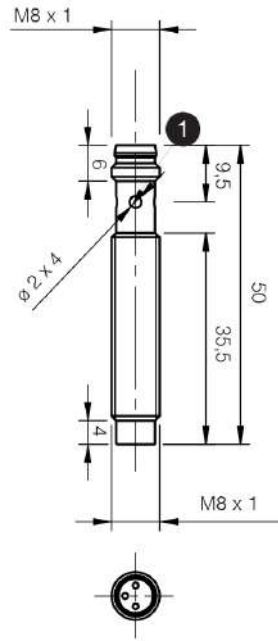

Response curves

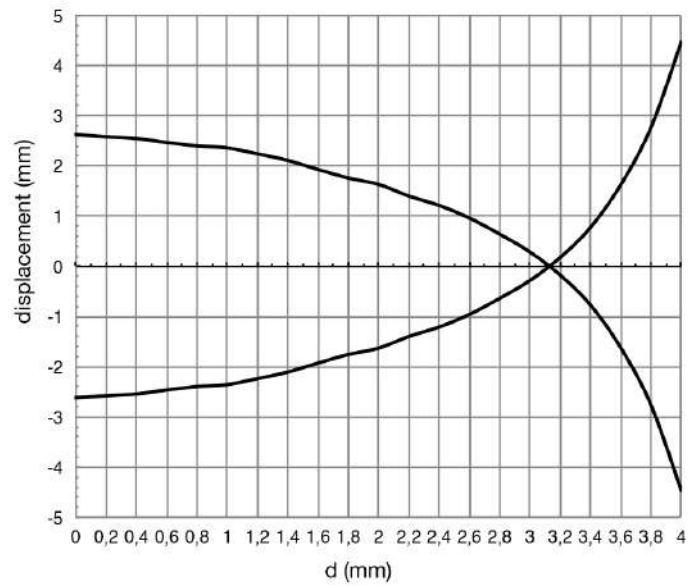

Installation

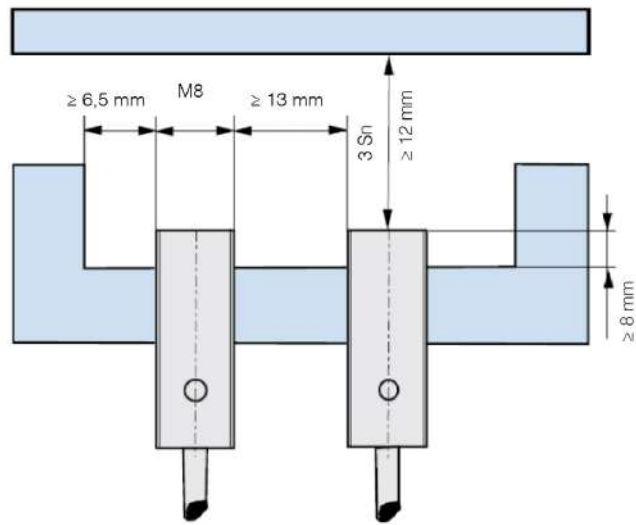

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
info@datasensing.com

**date of  
printing**  
28/06/2024  
09:57:26