



CD

CD12M/0E-050C1

**Connect.M12-F,8
poles-5m,PVC,90°**

TECHNICAL FEATURES

Application

Usable with

Safety light curtains: ∅ LS2 STANDARD (RX) ∅ LS4 STANDARD (RX)
∅ LP4ER/0*-***L12 (RX) ∅ LP4PF Safety sensors: ∅ SH and TH ∅
SH-IC and TH-IC

Installation

M12 8 poles axial female connector with PVC cable

Electrical data

Led

no

Wires

8

Mechanical data

Fibre lengh (m)

5


Head type

Axial

Plug	M12
Jacket material	PVC
Model	Female
Test/Approvals	
Degree of protection	IP67
Generical Data	
Mechanical Protection	IP67


CONNECTIONS

Eletrical diagram

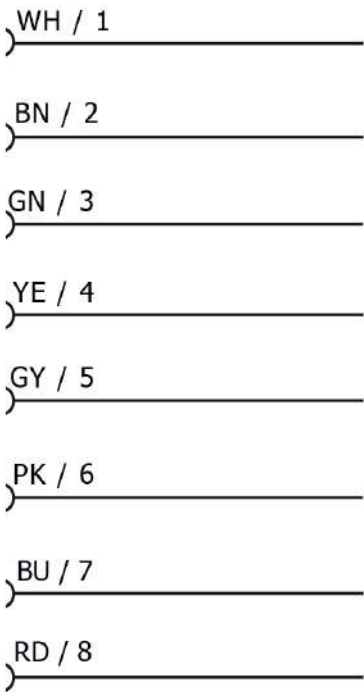

OTHERS

Dimensions

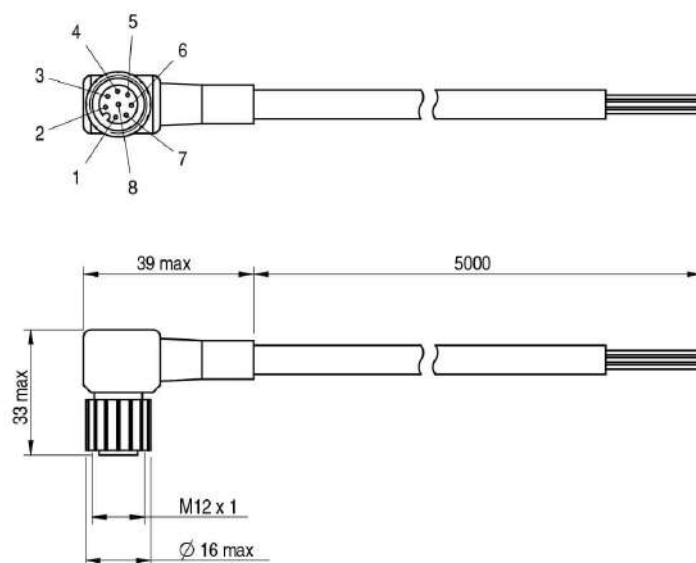

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of
printing**
28/06/2024
07:13:12